JOINT DIMENSIONS								
						TRANS. JOINTS	LONG. JOINTS	
D	a	b	c	d	e	f - min.	f - min.	g
5"	1"	1-3/4"	1-1/2"	1"	2"	1/4 D	1/3 D	1/2 D
6"	1"	2-1/4"	1-1/2"	1"	2-1/2"	1/4 D	1/3 D	1/2 D
8"	1"	3"	2"	1-1/2"	3-1/4"	1/4 D	1/3 D	1/2 D

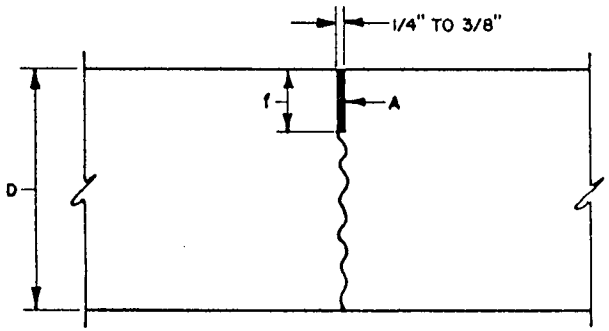

TYPE 1

SAWED JOINT

(LONGITUDINAL OR TRANSVERSE)

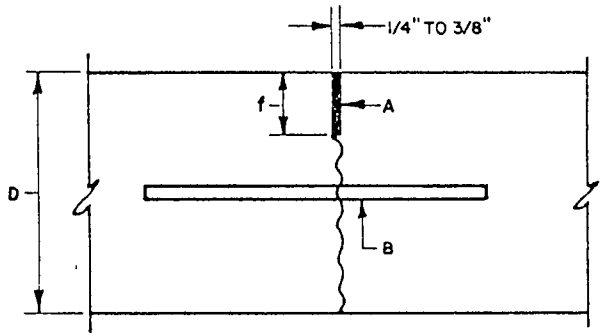

TYPE 2

DOWELED JOINT

(TRANSVERSE)

ARTERIAL/COLLECTOR STREETS ONLY

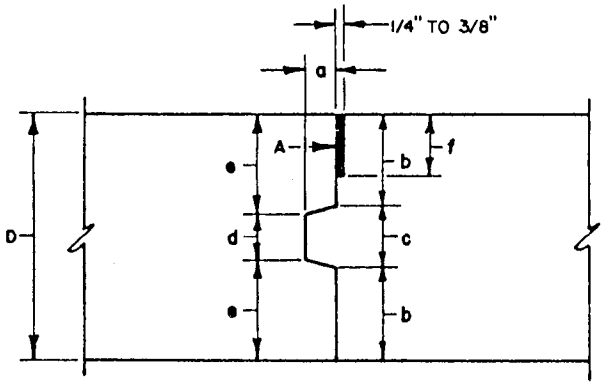

TYPE 3

KEYED JOINT

(LONGITUDINAL OR TRANSVERSE)

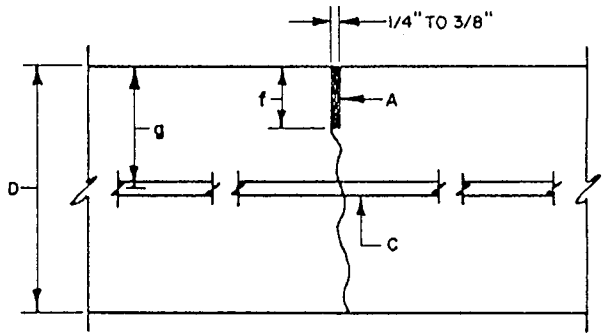

TYPE 4 ALTERNATE

TIED JOINT

(LONGITUDINAL OR TRANSVERSE)

GENERAL NOTES:

1. THICKNESS OF SLAB SHALL BE AS INDICATED ON DRAWINGS. SEE TABLE ABOVE.
2. DAILY CONCRETE PLACEMENT SHALL TERMINATE AT A JOINT.

CONSTRUCTION NOTES:

A. JOINT FILLER, INSTALL PER MANF. INSTR. OVER BACKER ROD OR JOINT TAPE.
B. 3/4" ø 16" SMOOTH DOWELL BAR @ 12" O.C., 1/2 GREASED 1/2 PAINTED.
C. NO. 4 DEFORMED BARS, 3'-0" LONG AT 2'-0" O.C.
D. THICKNESS OF SLAB.

CITY OF ALBUQUERQUE

REVISIONS
12/15/92

PAVING

CONCRETE JOINTS

DWG. 2450

AUG.1986