


76.5 KW DC

BARELAS SENIOR CENTER

714 7th Street SW, Albuquerque, NM 87102

225- CANADIAN SOLAR 340 WATT MODULES, 1- SOLAR EDGE 43.2 KW
INVERTER 1- 14.4 SOLAR EDGE INVERTER

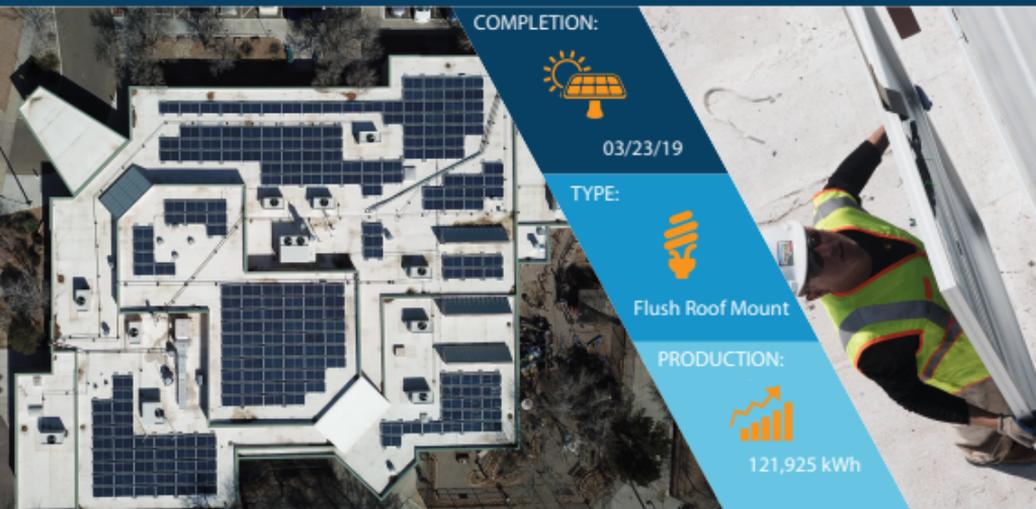

COMPLETION:



03/23/19

TYPE:



Flush Roof Mount

PRODUCTION:



121,925 kWh

SOLAR PV SYSTEM

Sol Luna Solar was honored to work with the City of Albuquerque on NCREB funded Renewable Energy Solar Projects in an effort to help COA achieve greater energy independence. The Barelas Senior Center project consisted of a flush mount roof top solar panel installation utilizing Unirac SM Solar Flush Mount racking. The installed system will deliver a 30 year electric bill savings of \$537, 607 for the City of Albuquerque.

Racking

Unirac: RM5 Roof Mount

Azimuth: 178 Degrees

Project Timeline

Signed Contract: 09/05/18

Construction: 01/13/19